

TVL4000 II™

SKU# TVL625




Photometric Data

Specifications are subject to change without any prior written notice.

WARM WHITE (3200K)	352 FC / 3800 LUX	139 FC / 1500 LUX	65 FC / 700 LUX	39 FC / 420 LUX	27 FC / 293 LUX
COOL WHITE (6500K)	446 FC / 4800 LUX	177 FC / 1900 LUX	84 FC / 900 LUX	50 FC / 542 LUX	34 FC / 362 LUX
FULL ON (4500-5000K)	790 FC / 8500 LUX	316 FC / 3400 LUX	146 FC / 1570 LUX	87 FC / 940 LUX	59 FC / 630 LUX

LUX x 0.0929 = FC

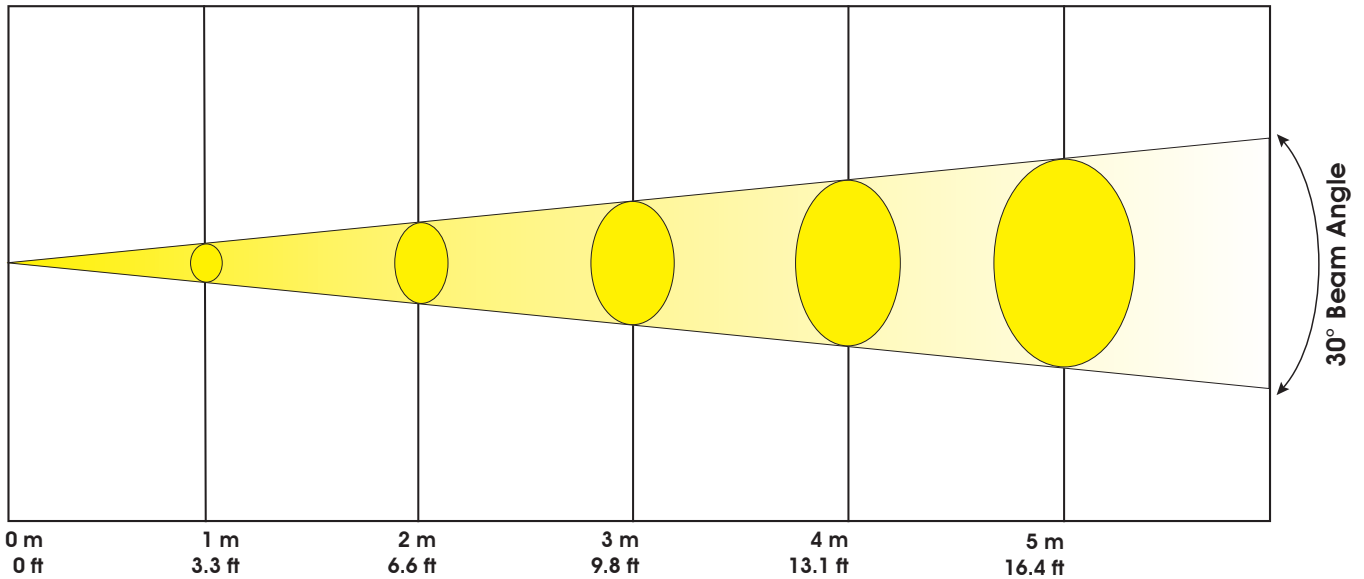

Max Beam Diameter

30° Beam Angle	Ø 0.5 m / Ø 1.6 ft	Ø 1.0 m / Ø 3.3 ft	Ø 1.6 m / Ø 5.2 ft	Ø 2.1 m / Ø 6.9 ft	Ø 2.6 m / Ø 8.5 ft
----------------	--------------------	--------------------	--------------------	--------------------	--------------------

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu