

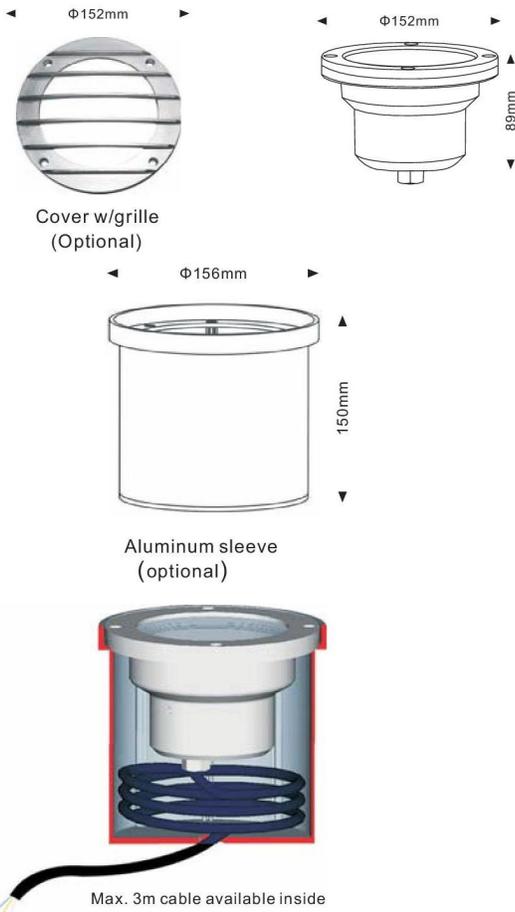


LED UNDERWATER LIGHT

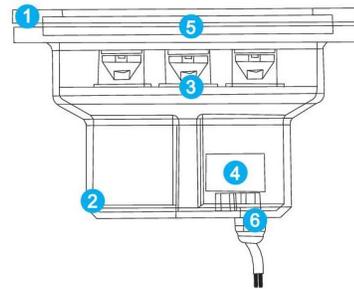


ELAR-4W03
ELAR-4W06

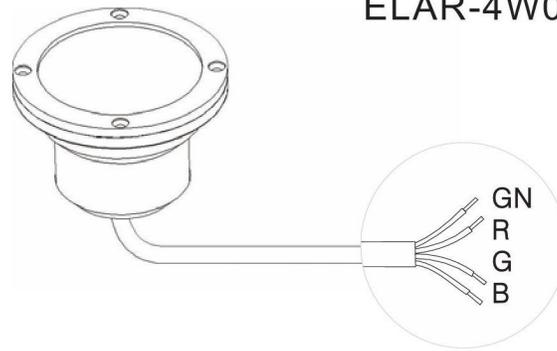

- Stainless steel trim
- Hi-power LED
- 5mm tempered glass
- Stainless steel housing
- Power and driver
- Brass cable gland

FEATURES

- RoHS materials compliant
- Machined stainless steel - 304#
- Source- Hi-power LED
- Opto LED symbiosis for peak lm
- Option: DMX 512 compatible
- Cable- H05RN-F 4X1.0mm² L=50cm

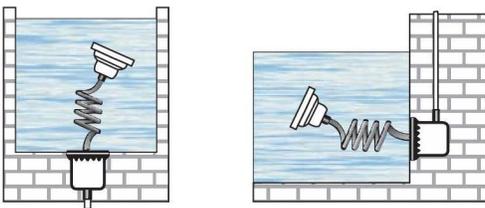

Notes:

1. Luminaire can not be installed 60cm below water surface.
2. Transformer must be installed outside fountain for security.

Model	LED Q'ty	LED Beam Angle (°)	Consumption(w)	IP Rating	Weight(kg)	Input Voltage
ELAR-4W03	9×1W RGB	25/45	12.7	68	2.33	24V DC
ELAR-4W06	9×3W RGB	25/45	21.5	68	2.33	24V DC

Use switching power supply or coil transformer only for 24V DC luminaire