



## KEY FEATURES

- Plug and Play LTC SMPTE time code generator and receiver
- USB powered
- Rugged design
- K-Lock security slot
- Windows and MAC compatible

## NX SYNC SPECIFICATIONS

### CONTROL/USER INTERFACE

- Capacity: 1 LTC SMPTE transmitter and receiver
- Configuration and management: ONYX software
- Device status: (3x) multicolor status LEDs

### CONSTRUCTION

- Housing: aluminum
- IP Rating: IP20

### SOFTWARE



Operating the NX SYNC with ONYX requires the use of a Windows PC running ONYX, which can be downloaded from the support website <http://support.obsidiancontrol.com>.

You must update your controller to the latest version of ONYX before using it for the first time, and periodically check the website for updates.

NX SYNC

CONNECTIONS

(1x) LTC SMPTE In/Out: 3-pin locking XLR  
USB In: USB 2.0 B  
K-Lock security slot

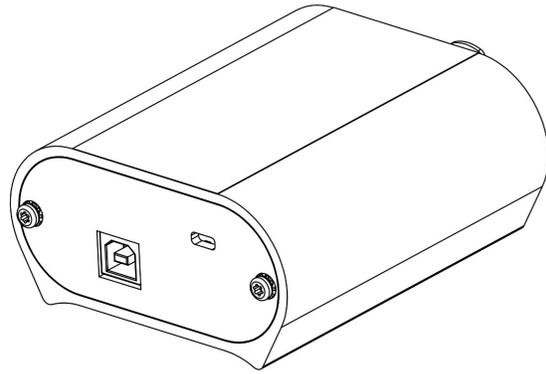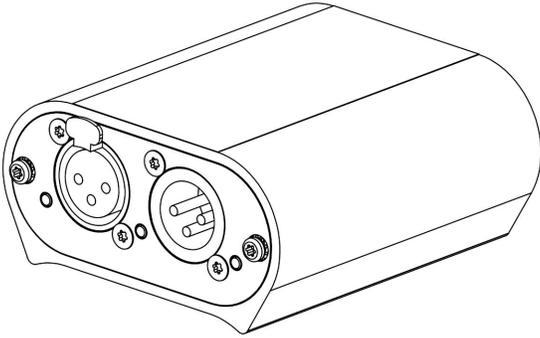

PHYSICAL

Length: 3.7" (92mm)  
Width: 3.3" (82mm)  
Height: 1.7" (41mm)  
Weight: 0.6lb. (245g)

ELECTRICAL

5VDC over USB  
Maximum current: 100mA

THERMAL

Operating temperature: 0° - 50°C (32° - 122°F)

ORDERING

INCLUDED ITEMS

(1x) Obsidian USB Cable

SKU

US #: NXS671

EU #: 1330000055

