

Features

- High efficiency UV LED
- Peak wavelength at 365nm
- Minimum visible light
- High output 6760mW at full intensity
- Special optics will not degrade by high UV exposure
- Flicker free
- 15 degrees narrow beam angle




Specification

- Input voltage	AC100-240V 50-60Hz	- Control option	DMX 512, Manual
- Rated power	19.1W @ 110VAC 18.8W @ 220VAC	- DMX channels	1, 2
- LED	9 x 1.9W High Power UV LED	- Operation	2 x 16 digit display with 4 buttons
- Refresh rate	500 Hz	- Power connection	Neutrik Powercon in/through
- Optics	15 degrees	- DMX data connection	5-pin XLR
- Radiant flux output	6760 mW	- Housing	Metal
- Project lamp life	20,000 hrs L70 at 25C	- Protection rating	IP-20 Indoor use only
- Peak wavelength	365nm	- Dimension	L 205 x W 125 x H 125 mm
		- Dry weight	2.64 kg

IP Enclosure Specification

- Housing: Metal
- Protection rating: IP-63
- Dimension: L 320.5 x W 173 x H 141.2 mm
- Dry weight: 3.08 kg

Dimensions

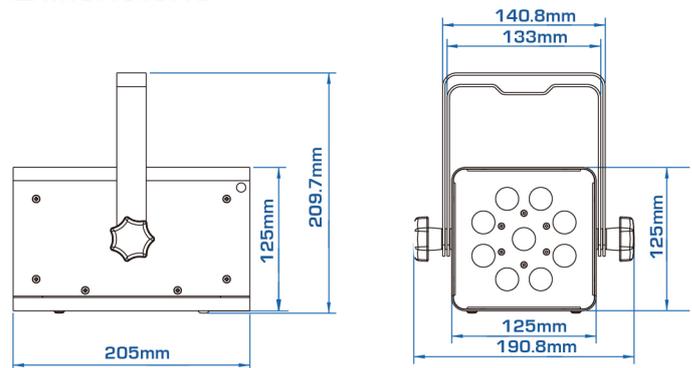

Illuminance measurement

Distance (m)	1	2	3	4	5
Intensity	4976 [$\mu\text{W}/\text{cm}^2$] 49.76 [W/m^2]	1675 [$\mu\text{W}/\text{cm}^2$] 16.75 [W/m^2]	807 [$\mu\text{W}/\text{cm}^2$] 8.07 [W/m^2]	614 [$\mu\text{W}/\text{cm}^2$] 6.14 [W/m^2]	451 [$\mu\text{W}/\text{cm}^2$] 4.51 [W/m^2]
Intensity degradation rate (compare with 1m)	0 %	66.3 %	83.8 %	87.7 %	90.9 %

Spectrum

