



FLEX PIXEL WP-14™

SKU#FLX775

The new FLEX PIXEL WP-14™ is an ETL listed 6.6 ft (2m) roll

of flexible LED pixel tape featuring (144) RGB SMD LED

pixels, a total of (432) DMX channels, spaced on 0.55"

(14mm) centers, enclosed in an IP65 rated flexible cover,

29W max power consumption, powered by an optional

5VDC universal auto switching power supply (110-240v).

FEATURES

6.6 ft (2m) Roll Flexible LED Pixel Tape

(144) RGB SMD LED Pixels


Spaced on 0.55" (14mm) Centers

(432) DMX Channels

Over 1 Billion Color Possibilities

IP65 Rated Flexible Cover

29W Max Power Consumption

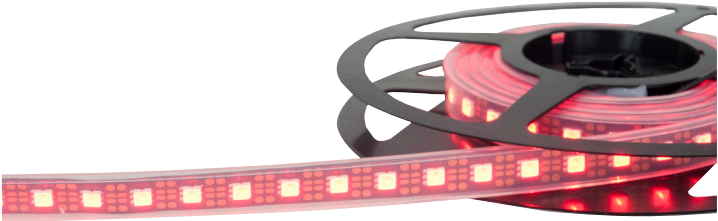

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

Flexible IP65 Rated LED Pixel Tape
Over 1 Billion Color Possibilities
Bright Output Low Wattage Consumption

SOURCE

(144) RGB SMD LED Pixels

PHOTOMETRIC DATA

1,008 LUX 94 FC (per each 1m)

CONTROL / CONNECTIONS

(432) DMX Channels

SIZE / WEIGHT

Length: 6.6' (2m) Roll
Width: 0.57" (14.5mm)
Vertical Height: 0.18" (4.5mm)
Weight: 10 oz. (0.3 kg)

ELECTRICAL / THERMAL

DC 5V
29W Max Power Consumption

APPROVALS / RATINGS

CE | cETLus | IP65

DIMENSIONAL DRAWINGS

W: 0.57" (14.5mm)



H: 0.18" (4.5mm)

PRODUCT ORDERING CODES

ORDER CODE	ITEM
FLX775	FLEX PIXEL WP-14™ 14mm 2m Pixel Tape Roll
FLE781	FLEX PIXEL 5VDC 5a Universal Power Supply (120/240V)
S-150-5	5VDC 150W PSU
FLE768	FLEX PIXEL 1 DMX Driver
EZK456	EZ KLING™ RJ45 to DMX, KlingNet™ and ArtNet™ Interface
FLE755	FLEX PIXEL Infrared Wireless Receiver & Remote
FPT-JC	FLEX PIXEL TAPE JUMPER FIRST CABLE
FPT-PC	FLEX PIXEL TAPE POWER CABLE

FLEX PIXEL WP-14 & FLEX PIXEL DRIVER 1 CONNECTION DIAGRAM

