



LUMINA STRIP™

SKU# LUM001

The new Lumina Strip™ features (10) 7W Warm White (2,700K) <80 CRI LEDs packaged in perfectly aligned halogen looking reflectors, 15° beam producing a smooth wash or blinder effect, electronic 16bit dimming (0-100%), variable dimming curves, individual pixel control (1-10), chase macros with variable speed and fade control, flicker free operation for TV and FILM, integrated dual yoke / floor stand, multiple unit power linking, 90W max power consumption, remote device management protocol support, and a multi-voltage universal auto switching power supply (120-240v).



FEATURES

- (10) 7W Warm White (2,700K) <80 CRI LEDs**
- Perfectly Aligned Halogen Looking Reflectors**
- 15° Beam Producing a Smooth Wash or Blinder Effect**
- Electronic 16bit Dimming (0-100%) + Variable Curves**
- Individual Pixel Control (1-10)**
- Chase Macros with Variable Speed and Fade Control**
- Flicker Free Operation for TV and FILM**
- Integrated Dual Yoke / Floor Stand**
- Multiple Unit Power Linking**
- 90W Max Power Consumption**
- Remote Device Management Protocol Support**



PRODUCT SPECIFICATIONS

FEATURES

15° Beam Producing a Smooth Wash or Blinder Effect
Electronic 16bit Dimming (0-100%)
Variable Dimming Curves
Individual Pixel Control (1-10)
Flicker Free Operation for TV and FILM
Integrated Dual Yoke / Floor Stand
Multiple Unit Power Linking
Remote Device Management Protocol Support

SOURCE

(10) 7W Warm White (2,700K) <80 CRI LEDs

PHOTOMETRIC DATA

20,334 LUX (1,889 FC) @ 3.3' (1m) (FULL ON)
5,084 LUX (472 FC) @ 6.6' (2m) (FULL ON)
2,259 LUX (210 FC) @ 9.8' (3m) (FULL ON)
1,271 LUX (118 FC) @ 13.1' (4m) (FULL ON)
813 LUX (76 FC) @ 16.4' (5m) (FULL ON)

EFFECTS

Electronic 16bit Dimming: 0% - 100%
Variable Dimming Curves
(Stage, TV, Architectural, Theatre)
Chase Macros with Variable Speed and Fade Control

CONTROL / CONNECTIONS

(9) DMX Channel Modes
(8-Bit: 7 / 8 / 10 / 11 / 16) (16-Bit: 8 / 10 / 16 / 26)
RDM (Remote Device Management)
(4) Button Control Panel
LCD Menu Display
5pin DMX In/Out
powerCON In/Out

SIZE / WEIGHT

Length: 41.0" (1042mm)
Width: 5.1" (128.5mm)
Vertical Height: 5.7" (146mm)
Weight: 13.9 lbs. (6.3 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
90W Max Power Consumption
Multiple Unit Power Linking:
MAX 16pcs (AC100-120V) or MAX 32pcs (220-240V)

APPROVALS / RATINGS

CE | IP20


INSTALLATION

Rigging: Integrated Dual Yoke / Floor Stand
Working Position: Any (360°)


INCLUDED ITEMS

(1) powerCON Cable
(2) Mounting Brackets and Screws

PHOTOMETRIC DATA

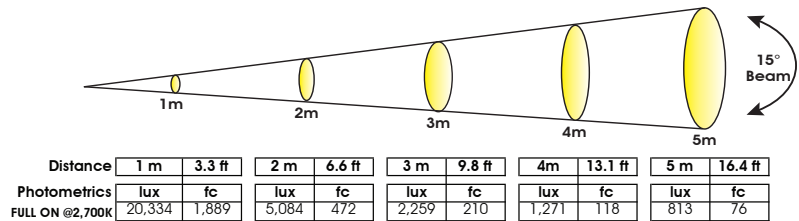

DIMENSIONAL DIAGRAM

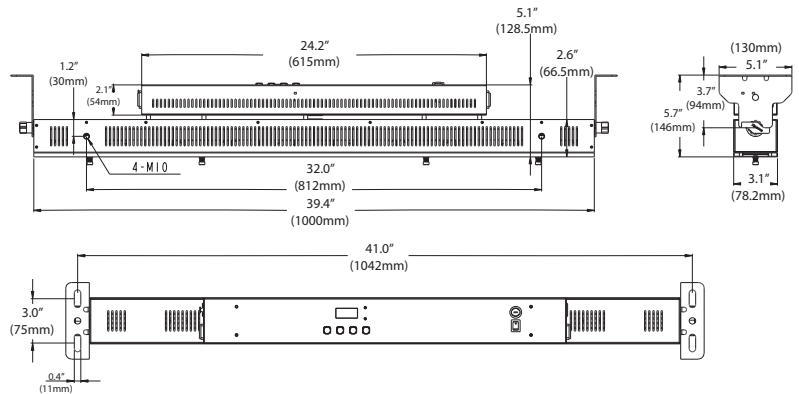

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
EWDMSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
EWDMMXT	Wireless DMX Transmitter
EWDMMXR	Wireless DMX Receiver
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
PLC3	3' (1m) PowerCON PRO Link Cable
	Additional cable lengths available