

STAGE COLOR
STAGE COLOR
STAGE COLOR



STAGE COLOR




DMX-512
RGB Color Mixing
PAR CAN

dare to
be different

The Elation® Stage Color is a high-tech, multi-color DMX par can that takes stage lighting to the next generation.

It has the ability to create virtually any color combination needed for mood-enhancing, background lighting.

By using a controller or the pre-set options the user can instantly change a deep forest setting into a spectacular ocean blue backdrop at the touch of a switch, saving valuable time changing from one scene to the next.



STAGE COLOR

DMX-512 RGB Color Mixing PAR CAN

features & specs

OPTICAL SYSTEM & LENSES

- Standard Medium 12 x 19° angle lens
- Optional Narrow 10° lens
- Optional Wide 16 x 30° lens
- 3 aluminum reflectors

COLORS

- 3 dichroic filters
- R, G, B color mixing

DIMMERS


- 3 channel electronic dimmer
- 5 amp per channel
- 600 watts per channel maximum

Unique head design allows for quick lamp replacement




NARROW ANGLE LENS [OPTIONAL]

Red	1030/96	230/22	125/12	61/6	49/5	LUX/Foot-candles
Green	2200/205	560/52	250/24	140/13	90/9	LUX/Foot-candles
Blue	460/47	109/11	52/5	30/3	20/2	LUX/Foot-candles
RGB	2300/214	820/77	420/39	220/21	137/13	LUX/Foot-candles

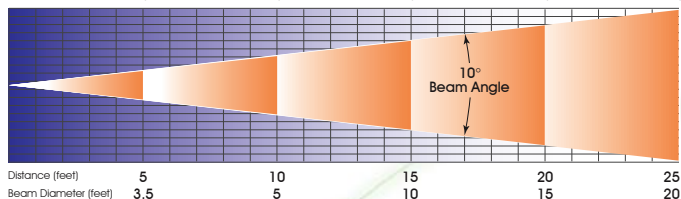


MEDIUM ANGLE LENS [INCLUDED]

Red	540/50	178/17	75/7	42/4	34/3	LUX/Foot-candles
Green	960/89	320/30	169/16	103/10	62/6	LUX/Foot-candles
Blue	280/26	86/8	39/4	23/2	15/1	LUX/Foot-candles
RGB	1720/160	520/49	218/21	144/14	92/9	LUX/Foot-candles

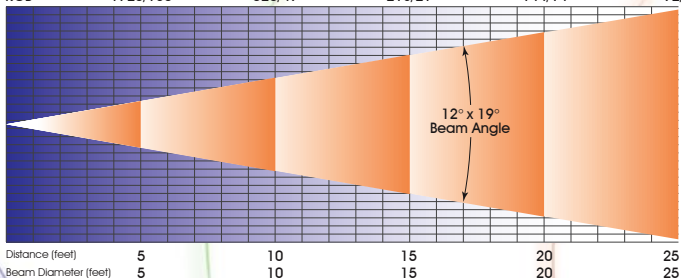

WIDE ANGLE LENS [OPTIONAL]

Red	490/45	127/11	58/5	32/3	23/2	LUX/Foot-candles
Green	940/87	265/24	120/11	67/6	48/4	LUX/Foot-candles
Blue	282/26	80/7	30/3	18/2	12/1	LUX/Foot-candles
RGB	1260/117	320/30	178/17	110/11	67/7	LUX/Foot-candles

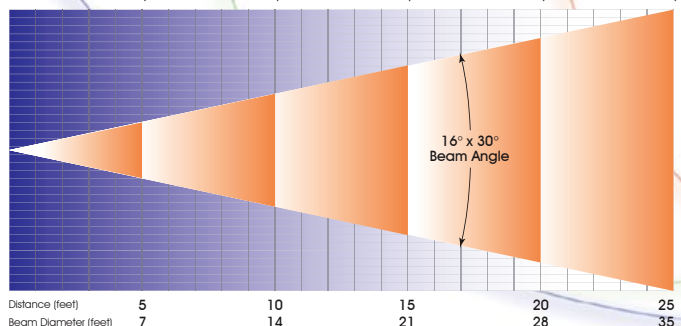

technical specs & data

ELECTRONICS

- Digital LED Display
- 3 pin DMX-512 digital serial input & output
- Output limiter 50-100%
- Stand-alone function
- 10 preset programs
- On-board speed & fade control
- Master/Slave settings

3 MODE PRESETS

Channel	Mode 1[RGB]	Mode 2[C&B]	Mode 3[COLOR]
1	Red	Color Scroll	Color Scroll
2	Green	Dimmer	
3	Blue		

FAN & COOLING

- 1 High Speed Axial Fan
- Thermal sensor protection

POWER SUPPLY

- Power input: AC 12V~50-60hz
- Fuses: 3 x 5A 120v GMA
- Power consumption:
 - 5-15 amps, variable (575W lamp)
 - 3-10 amps, variable (400W lamp)

DIMENSIONS & WEIGHT

- Length 18 in (458 mm)
- Width 8.5 in (220 mm)
- Height 10 in (258 mm)
- Weight 10 lbs. (4.65 kg)

RIGGING

- Metal yoke

LAMP SPECIFICATIONS

- 13 lamps needed per fixture

MODEL	WATTS	COLOR TEMP	HOURS	VOLTS
HX-600	575	3200	300	120
HX-601	575	3050	1500	120
HX-400	400	3200	300	120
HX-401	400	3050	1500	120
HPL-375	375	3200	300	120
HPL-375/2	375	3050	1500	120



- Digital LED display
- Mode selection button
- Up and Down channel assignment buttons
- 3 pin XLR in and out connections



tel. 323 582 3322
fax. 323 582 3108
e-mail. info@ElationLighting.com